



Imperial [IP] Dimensions
Metric (SI) in Parentheses

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com

RSPA35

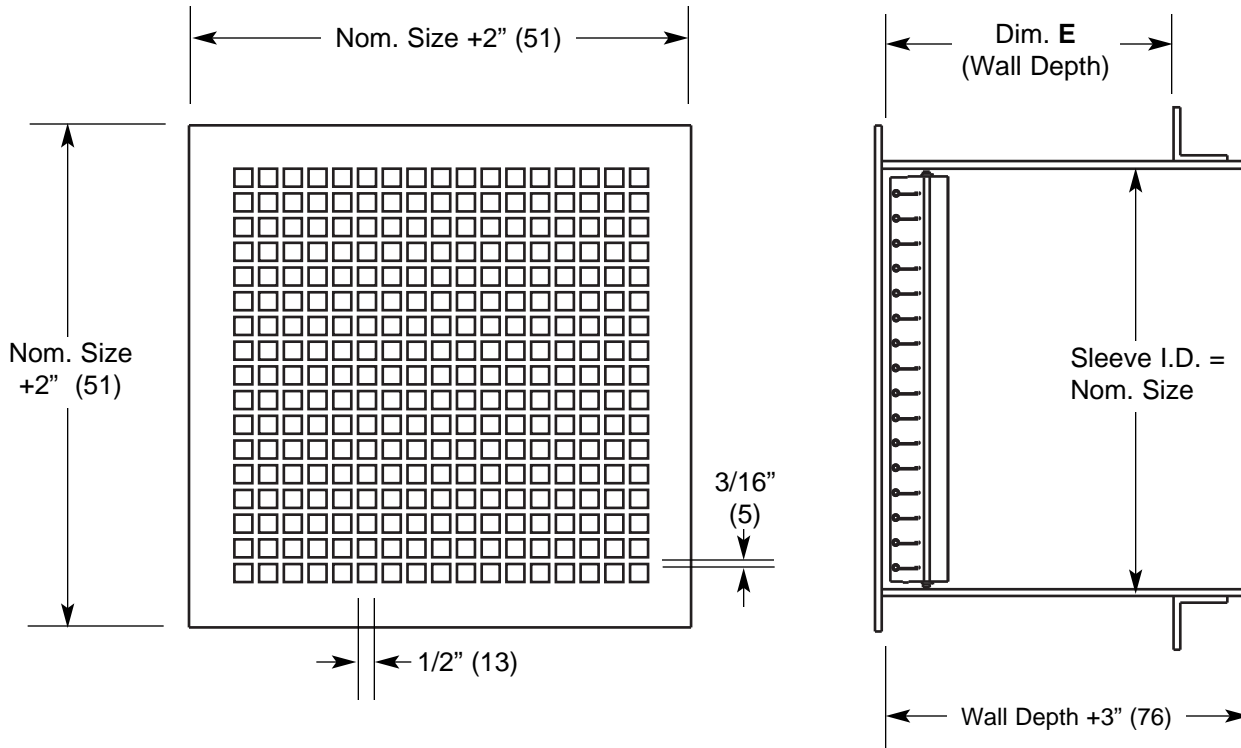

RSPA36



Model Notes:

1. Opposed Blade damper is electrogalvanized steel construction.
2. Damper is operated via flat-blade screwdriver through the face as standard.

Overall Notes:

- Face is 12 gauge hot rolled steel, with 1/2" (13) square holes and 3/16" (5) frets.
- Sleeve is constructed of 12 gauge hot rolled steel.
- Wall Angles are 1-1/2" x 1-1/2" x 1/8" (38 x 38 x 3) hot rolled steel. They are shipped in 4 pieces for field welding.
- Grille is steel double deflection supply model RSDB.
- Metric dimensions are given in millimeters.
- Standard finish is electrocoat acrylic baked enamel.
- Standard color is #11 Bright White.
- Recommended Minimum Wall Opening Size is Listed Size Plus 3/4" (19).
- On large sizes, face may warp slightly, up to 1/8" over one foot.
- Size 12" x 12" (305 x 305) with an 8" (203) wall depth, is shown above.