
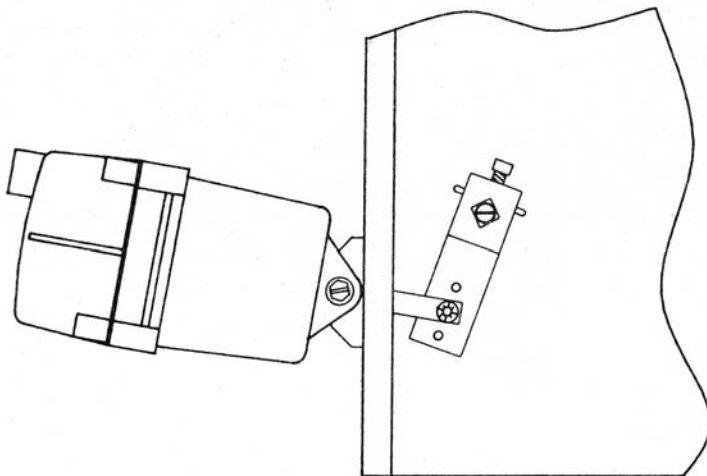
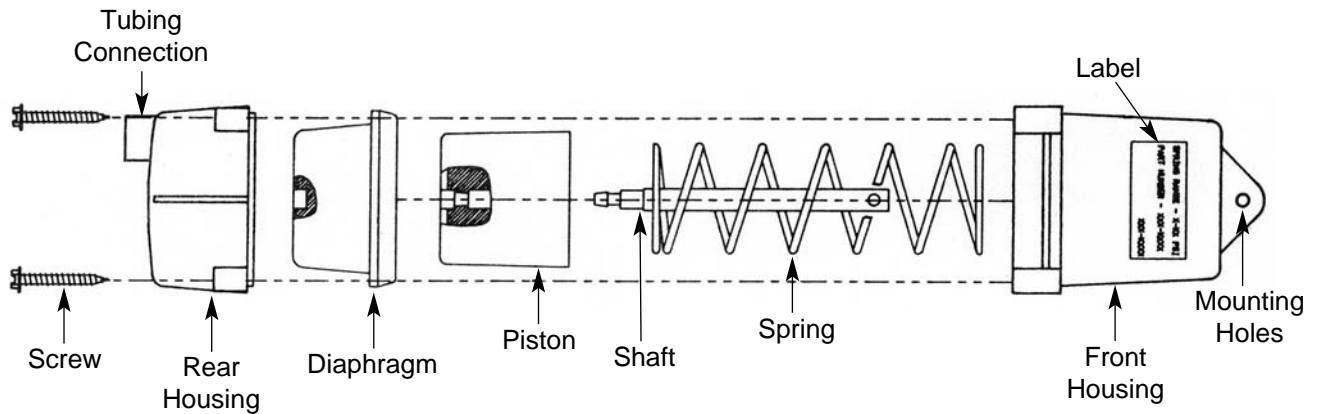


Imperial [IP] Dimensions
Metric (SI) in Parentheses

CARNES COMPANY, 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone (608) 845.6411 Fax: (608) 845.6470 carnes@carnes.com

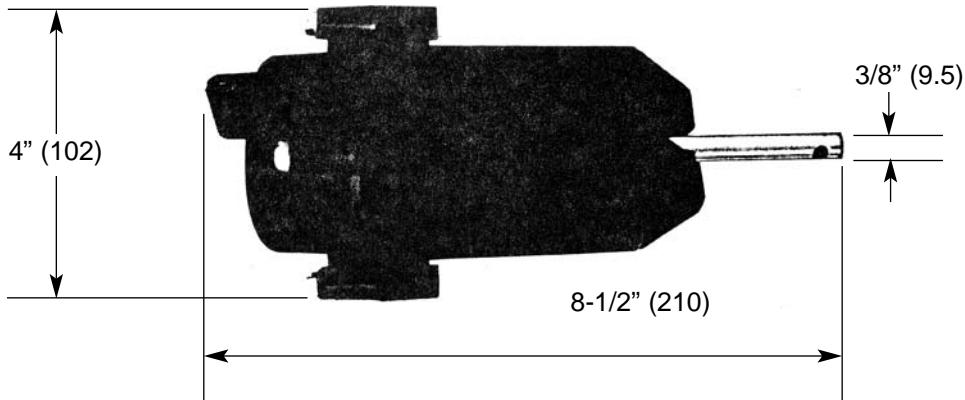

Typical VAV Application

SPECIFICATIONS

Housing: Black Nylon reinforced with 33% glass fiber.
Shaft: 3/8" (9.5) cold rolled steel.
Stroke: 2-1/2" (64).
Supply Pressure: 0-20 psi.
Spring Ranges: 3-8 psi., 5-10 psi., 8-13 psi.
Connection: 3/16" (4.8) nipple for 1/4" (6.4) O.D. tubing.
Mounting: Pivot Bracket.
U.L. Rating: 94 HB
Weight: 16 oz. (494 g.)