


Imperial [IP] Dimensions  
Metric (SI) in Parentheses

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com

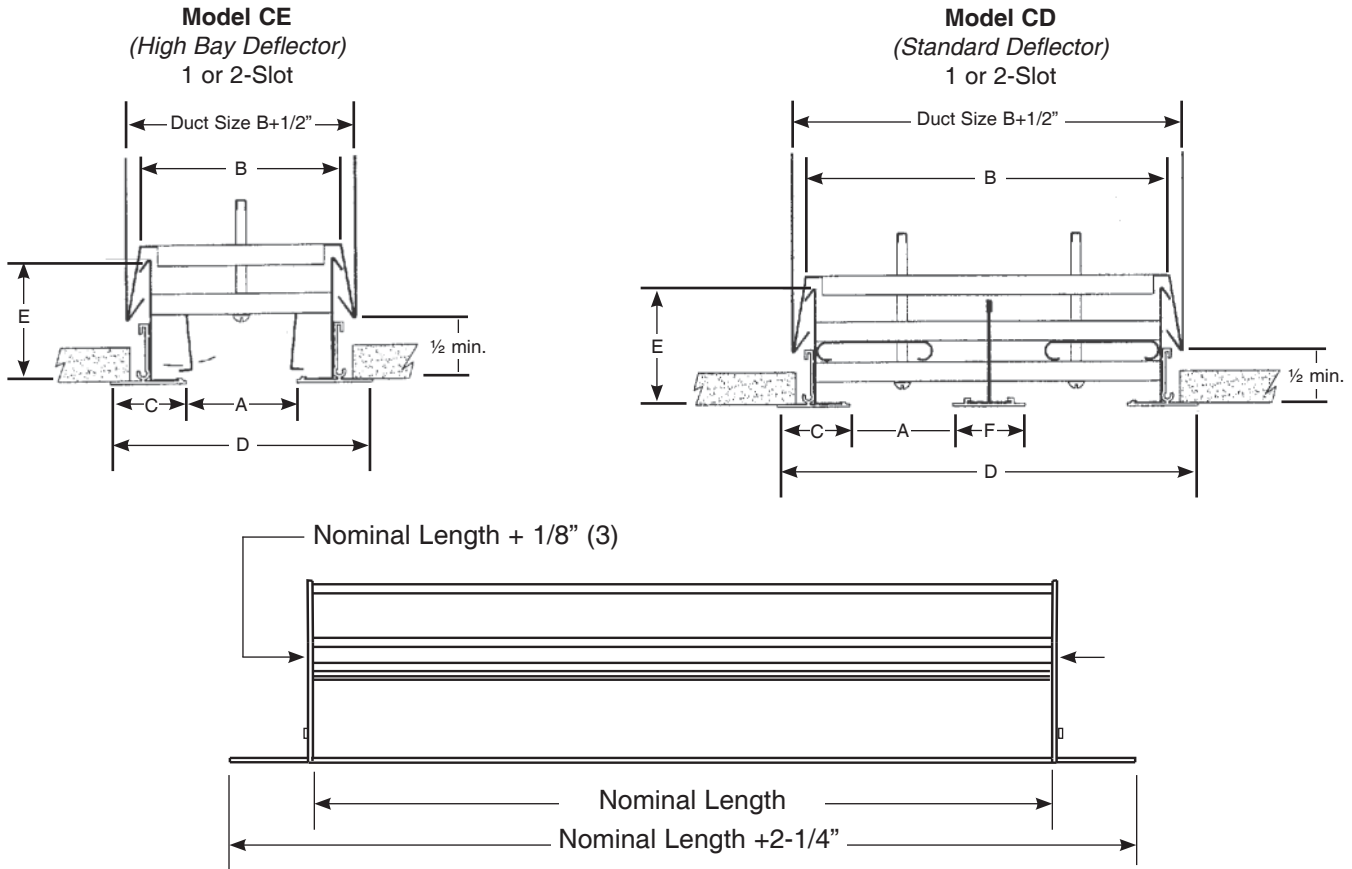

**Notes:**

- Construction is extruded aluminum.
- Standard finish is #37 Bright White Face with Flat Black Interior.
- Units are straight as standard. They can be curved on request.
- Maximum single panel length is 96" (2438).
- Minimum length is 12" (305).
- Metric dimensions are in millimeters.
- This frame style permits the installation of the plenum and drywall before the diffuser is installed.
- Standard mounting is via hem duct brackets. Screws pass through the spacer brackets in the diffuser into the hem duct brackets.
- Recommended opening is length +1/4" and width +1/2".

| Dim. | Description   | 1-Slot Slot Width (A) |                 |                 |                 |                 | 2-Slot Slot Width (A) |                 |                 |                  |                  |
|------|---------------|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-----------------|-----------------|------------------|------------------|
|      |               | 1"                    | 1-1/2"          | 2"              | 2-1/2"          | 3"              | 1"                    | 1-1/2"          | 2"              | 2-1/2"           | 3"               |
| B    | Neck O.D.     | 2-5/8"<br>(67)        | 3-1/8"<br>(79)  | 3-5/8"<br>(92)  | 5-1/2"<br>(140) | 6"<br>(153)     | 5-1/8"<br>(130)       | 6-1/8"<br>(156) | 7-1/8"<br>(181) | 10-5/8"<br>(270) | 11-5/8"<br>(295) |
| C    | Flange Width  | 1-3/8"<br>(35)        | 1-3/8"<br>(35)  | 1-3/8"<br>(35)  | 2-1/16"<br>(52) | 2-1/16"<br>(52) | 1-3/8"<br>(35)        | 1-3/8"<br>(35)  | 1-3/8"<br>(35)  | 2-1/16"<br>(52)  | 2-1/16"<br>(52)  |
| D    | Face O.D.     | 3-3/4"<br>(95)        | 4-1/4"<br>(108) | 4-3/4"<br>(121) | 6-5/8"<br>(168) | 7-1/8"<br>(181) | 6-1/8"<br>(165)       | 7-1/8"<br>(181) | 8-1/8"<br>(206) | 11-3/4"<br>(298) | 12-3/4"<br>(324) |
| E    | Unit Height   | 2-1/4"<br>(57)        | 2-1/4"<br>(57)  | 2-1/4"<br>(57)  | 3"<br>(76)      | 3"<br>(76)      | 2-1/4"<br>(57)        | 2-1/4"<br>(57)  | 2-1/4"<br>(57)  | 3"<br>(76)       | 3"<br>(76)       |
| F    | Center Flange | ---                   | ---             | ---             | ---             | ---             | 1-3/8"<br>(35)        | 1-3/8"<br>(35)  | 1-3/8"<br>(35)  | 2-5/8"<br>(67)   | 2-5/8"<br>(67)   |